

General Description

The MxL76502 is a fully integrated, high-efficiency synchronous step-down converter that requires a minimum number of external components. It offers a very compact solution with up to 2A continuous output current over a wide input range.

The MxL76502 uses a proprietary constant on-time (COT) control scheme that provides a superior transient response and maintains a constant switching frequency during continuous conduction mode (CCM) operation. The external ramp compensation network enables stable operation with ultra-low equivalent series resistance (ESR) output ceramic capacitors. An internal compensated error amplifier in the control loop provides excellent line and load regulation.

The MxL76502 integrates extensive protection functions, including under-voltage lockout (UVLO), over-current protection (OCP), under-voltage protection (UVP), and thermal shutdown.

The MxL76502 offers two modes of operation, PFM (MxL76502N) and forced PWM—FPWM—(MxL76502A), to suit different applications. PFM mode provides high efficiency at light loads and low standby power. FPWM mode provides low ripple voltage and fast transient, even at light loads.

The converter is available in a small 6-pin SOT23-6L package.

Features

- Input voltage range: 4.5V to 18V
- Output voltage range: 0.6V to 18V
- 2A continuous output current
- Supports 100% duty cycle low-dropout operation
- Stable operation with low ESR ceramic output capacitors
- Fast pulse-width modulation (PWM) COT control with superior transient performance
- 720KHz switching frequency
- 1.2ms internal soft-start
- 90mΩ/67mΩ integrated high-side (HS)/low-side (LS) power switches
- Accurate EN/UVLO threshold
- High-efficiency operation at light load (MxL76502N)
- FPWM mode of operation (MxL76502A)
- Thermal shutdown with auto-recovery
- Hiccup mode short-circuit protection
- Available in a 6-pin SOT23-6L package

Applications

- Laptop computers
- Tablet PCs
- Networking systems
- Personal video recorders
- Flat panel television and monitors
- Distributed power systems

Typical Application

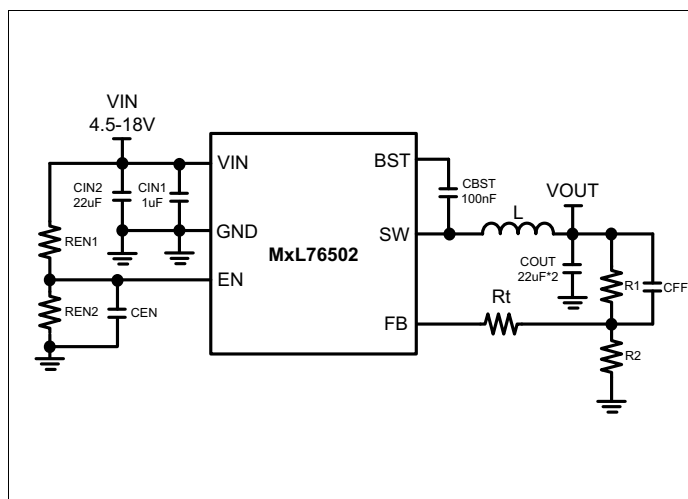


Figure 1: Typical Application Schematic

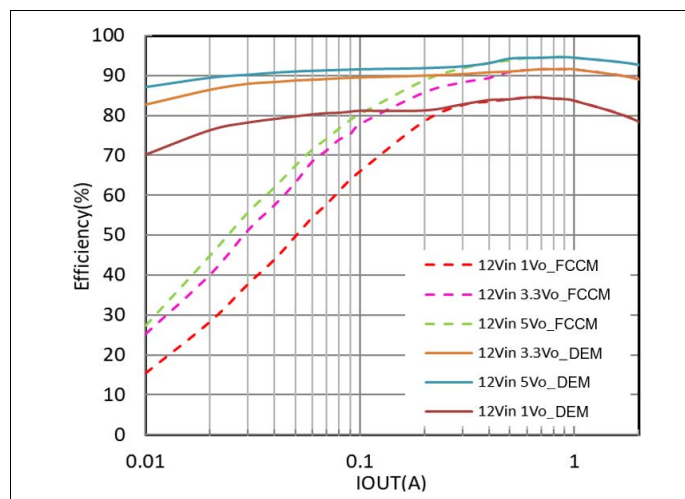


Figure 2: MxL76502 Efficiency

Revision History

| Document No. | Release Date | Change Description |
|----------------|---------------|--------------------|
| 285-76502DSR01 | March 7, 2025 | Initial release. |

Table of Contents

General Description

Features.....

Applications

Specifications

Absolute Maximum Ratings.....

Recommended Operating Conditions

Thermal Specifications

Electrical Characteristics

Pin Information

Pin Configuration

Pin Description

Block Diagram

Typical Application Circuit.....

Typical Performance Characteristics

Mechanical Dimensions

SOT23-6L

Recommended Land Pattern and Stencil.....

SOT23-6L

Ordering Information.....

i

i

i

1

1

1

1

2

4

4

4

5

6

7

13

13

14

14

15

List of Figures

| | |
|---|----|
| Figure 1: Typical Application Schematic..... | i |
| Figure 2: MxL76502 Efficiency | i |
| Figure 4: MxL76502 Pinout (Top View)..... | 4 |
| Figure 5: Functional Block Diagram | 5 |
| Figure 6: MxL76502 Typical Application..... | 6 |
| Figure 7: Steady State Test— $V_{IN} = 12V$, $V_{OUT} = 5V$, $I_{OUT} = 0A$ | 7 |
| Figure 8: Steady State Test— $V_{IN} = 12V$, $V_{OUT} = 5V$, $I_{OUT} = 2A$ | 7 |
| Figure 9: Load Transient Response— $V_{IN} = 12V$, $V_{OUT} = 5V$, $I_{OUT} = 0A-2A$ | 7 |
| Figure 10: Load Transient Response— $V_{IN} = 12V$, $V_{OUT} = 1V$, $I_{OUT} = 0A-2A$ | 7 |
| Figure 11: V_{IN} Power On— $V_{IN} = 12V$, $V_{OUT} = 5V$, $I_{OUT} = 0A$ | 7 |
| Figure 12: V_{IN} Power On— $V_{IN} = 12V$, $V_{OUT} = 5V$, $I_{OUT} = 2A$ | 7 |
| Figure 13: V_{IN} Power Off— $V_{IN} = 12V$, $V_{OUT} = 5V$, $I_{OUT} = 0A$ | 8 |
| Figure 14: V_{IN} Power Off— $V_{IN} = 12V$, $V_{OUT} = 5V$, $I_{OUT} = 2A$ | 8 |
| Figure 15: EN Power On— $V_{IN} = 12V$, $V_{OUT} = 5V$, $I_{OUT} = 0A$ | 8 |
| Figure 16: EN Power On— $V_{IN} = 12V$, $V_{OUT} = 5V$, $I_{OUT} = 2A$ | 8 |
| Figure 17: EN Power Off— $V_{IN} = 12V$, $V_{OUT} = 5V$, $I_{OUT} = 0A$ | 8 |
| Figure 18: EN Power Off— $V_{IN} = 12V$, $V_{OUT} = 5V$, $I_{OUT} = 2A$ | 8 |
| Figure 19: Short Circuit Protection— $V_{IN} = 12V$, $V_{OUT} = 5V$, $I_{OUT} = 2A$ —Short..... | 9 |
| Figure 20: Short Circuit Protection Recovery— $V_{IN} = 12V$, $V_{OUT} = 5V$, $I_{OUT} = \text{Short}-2A$ | 9 |
| Figure 21: Mechanical Dimensions—SOT23-6L | 13 |
| Figure 22: Recommended Land Pattern and Stencil—SOT23-6L | 14 |

List of Tables

| | |
|--|----|
| Table 1: Absolute Maximum Ratings | 1 |
| Table 2: Recommended Operating Conditions..... | 1 |
| Table 3: Thermal Performance | 1 |
| Table 4: Electrical Characteristics | 2 |
| Table 5: Pin Description..... | 4 |
| Table 6: Ordering Information..... | 15 |

Specifications

Absolute Maximum Ratings

Important: The stresses above what is listed under the following table may cause permanent damage to the device. This is a stress rating only—functional operation of the device above what is listed under the following table or any other conditions beyond what MaxLinear recommends is not implied. Exposure to conditions above the recommended extended periods of time may affect device reliability.

Table 1: Absolute Maximum Ratings

| Parameter | Min | Max | Units |
|--|------|-----------------------|-------|
| V _{IN} Voltage, EN | −0.3 | 19 | V |
| SW Voltage | −0.3 | V _{IN} + 0.3 | V |
| Dynamic V _{SW} in 10ns Duration | −3 | V _{IN} + 3 | V |
| BS-SW Voltage | −0.3 | 6 | V |
| FB Voltage | −0.3 | 6 | V |
| Junction Temperature Range | −40 | 150 | °C |
| Storage Temperature Range | −65 | 150 | °C |
| Lead Temperature (Soldering 10s) | - | 260 | °C |

Note: The voltage measured across each pin to GND should not exceed the maximum and minimum range.

Recommended Operating Conditions

Table 2: Recommended Operating Conditions

| Symbol | Parameter | Min | Max | Units |
|-----------------|--------------------------------------|-----|-----|-------|
| V _{IN} | Input Voltage | 4.5 | 18 | V |
| T _A | Operating Ambient Temperature Range | −40 | 85 | °C |
| T _J | Operating Junction Temperature Range | −40 | 125 | °C |

Note: The device is not guaranteed to function outside of the recommended operating conditions.

Thermal Specifications

Thermal information is measured on a 4-layer JESD51-7 PCB.

The maximum allowable power dissipation (T_A = 25°C) is a function of the maximum junction temperature T_{J_MAX}, the junction-to-ambient thermal resistance θ_{JA} , and the ambient temperature T_A. The maximum allowable continuous power dissipation at any ambient temperature is calculated by $P_{D_MAX} = (T_{J_MAX} - T_A)/\theta_{JA}$. Exceeding the maximum allowable power dissipation causes excessive die temperature, and the regulator goes into thermal shutdown. The internal thermal shutdown circuitry protects the device from permanent damage.

Table 3: Thermal Performance

| Symbol | Parameter | Package | Typ | Max | Units |
|---------------|--|----------|-----|------|-------|
| - | Package Power Dissipation | SOT23-6L | - | 0.91 | W |
| θ_{JA} | Junction-to-Ambient Thermal Resistance | SOT23-6L | - | 137 | °C/W |
| θ_{JC} | Junction-to-Case Thermal Resistance | SOT23-6L | 93 | - | °C/W |

Electrical Characteristics

Electrical characteristics at $V_{IN} = 12V$, $V_{EN} = 5V$, $V_{OUT} = 5V$, $T_A = 25^\circ C$, unless otherwise specified. The • denotes the specifications that apply over the temperature range of $-40^\circ C$ to $85^\circ C$, unless otherwise specified.

Table 4: Electrical Characteristics

| Symbol | Parameter | Conditions | | Min | Typ | Max | Units |
|----------------|--|-------------------------------|---|-------|------|-------|------------|
| V_{IN} | Input Voltage Range | - | | 4.5 | - | 18 | V |
| I_{SHDN} | Shutdown Current | $25^\circ C$ | | - | 5 | - | μA |
| | | $-40^\circ C$ to $85^\circ C$ | • | 0.9 | - | 10 | |
| V_{INUVLO} | Input Under-Voltage Lockout Threshold Rising | $25^\circ C$ | | 3.8 | 4 | 4.2 | V |
| | | $-40^\circ C$ to $85^\circ C$ | • | 3.685 | - | 4.315 | |
| $V_{UVLO-HYS}$ | Input Under-Voltage Lockout Hysteresis | $25^\circ C$ | | - | 300 | - | mV |
| I_{IN} | Supply Current (MxL76502N) | $25^\circ C$ | | - | 250 | - | μA |
| | | $-40^\circ C$ to $85^\circ C$ | • | 70 | - | 330 | |
| I_{IN} | Supply Current (MxL76502A) | $25^\circ C$ | | - | 600 | - | μA |
| | | $-40^\circ C$ to $85^\circ C$ | • | 190 | - | 2200 | |
| V_{FB_REF} | Feedback Reference Voltage | $-40^\circ C$ to $85^\circ C$ | • | 588 | 600 | 612 | mV |
| I_{FB} | Feedback Current | $25^\circ C$ | | - | 10 | 50 | nA |
| | | $-40^\circ C$ to $85^\circ C$ | • | - | - | 65 | |
| T_{SS} | Internal Soft-Start Time ⁽¹⁾ | $25^\circ C$ | | - | 1.2 | - | ms |
| F_{SW} | Switching Frequency | $25^\circ C$ | | - | 720 | - | kHz |
| | | $-40^\circ C$ to $85^\circ C$ | • | 570 | - | 870 | |
| T_{OFF_MIN} | Minimum Off Time ⁽¹⁾ | $25^\circ C$ | | - | 140 | - | ns |
| | | $-40^\circ C$ to $85^\circ C$ | • | - | - | 250 | |
| D_{MAX} | Maximum Duty Cycle ⁽²⁾ | $25^\circ C$ | | - | 100 | - | % |
| R_{ON_HS} | HS Main Switch-On Resistance | $25^\circ C$ | | - | 90 | - | m Ω |
| HS_SW_{LKG} | HS Switch Leakage Current | $25^\circ C$ | | - | 0.1 | - | μA |
| | | $-40^\circ C$ to $85^\circ C$ | • | - | - | 10 | |
| I_{LIMIT} | Peak Current Limit | $25^\circ C$ | | 3.8 | 4.5 | 5.2 | A |
| | | $-40^\circ C$ to $85^\circ C$ | • | 3.6 | - | 5.3 | |
| I_{ZX} | LS Switch Zero-Cross Current (MxL76502N) | $25^\circ C$ | | - | 0 | - | mA |
| I_{NEG} | LS Switch Negative Current Limit (MxL76502A) | $25^\circ C$ | | - | -1.5 | - | A |
| R_{ON_LS} | LS Switch-On Resistance | $25^\circ C$ | | - | 67 | - | m Ω |
| LS_SW_{LKG} | LS Switch Leakage Current | $25^\circ C$ | | - | 0.1 | - | μA |
| | | $-40^\circ C$ to $85^\circ C$ | • | - | - | 10 | |
| V_{IH} | EN On Threshold | V_{EN} ramp up | | - | 1.21 | - | V |
| V_{IL} | EN Off Threshold | V_{EN} ramp down | | - | 1.11 | - | V |
| R_{EN} | EN Internal Pull-Down Resistor | $25^\circ C$ | | - | 1000 | - | K Ω |

Table 4: Electrical Characteristics (Continued)

| Symbol | Parameter | Conditions | | Min | Typ | Max | Units |
|--------|--|------------|--|-----|-----|-----|-------|
| - | Thermal Shutdown ⁽¹⁾ | - | | - | 160 | - | °C |
| - | Thermal Shutdown Hysteresis ⁽¹⁾ | - | | - | 30 | - | °C |

1. Guaranteed by design, no production test.

2. When the input voltage approaches the output voltage, the MxL76502 device extends the on-time and forces the main high-side switch to remain on for multiple cycles ($>10\ \mu\text{sec}$). The high-side switch is only momentarily turned off, and the low-side switch is forced on shortly (typically 120ns) to refresh the BST capacitor. The high-side switch resumes on after the BST capacitor refresh pulse.

Pin Information

Pin Configuration

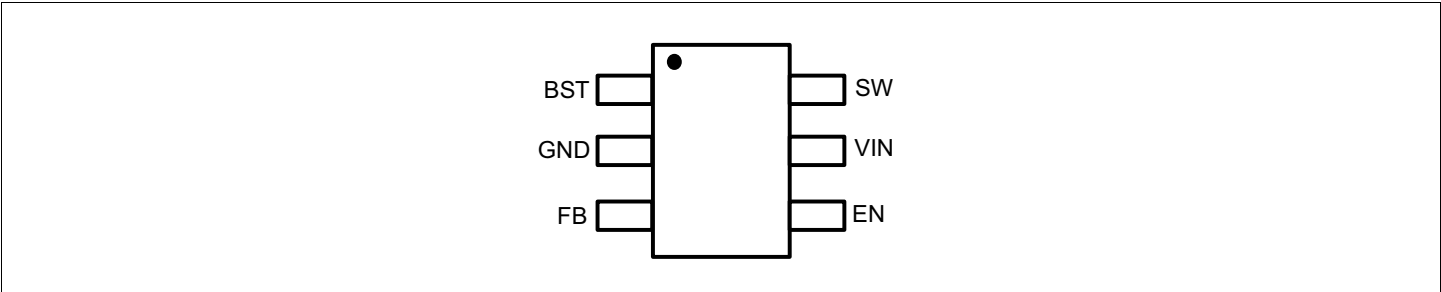


Figure 4: MxL76502 Pinout (Top View)

Pin Description

Table 5: Pin Description

| Pin Number | Pin Name | Description |
|------------|----------|---|
| 1 | BST | Bootstrap pin. A 100nF ceramic capacitor connected between the SW and BST pins is required to form a floating supply for the high-side (HS) switch driver. |
| 2 | GND | Power Ground pin. |
| 3 | FB | Feedback pin. An external resistor divider from the output to GND, connected to the FB pin, sets the output voltage. |
| 4 | EN | Enable pin. The MxL76502 device is shut down when this pin is low and active when this pin is high. The hysteretic enable threshold voltage is 1.21V going up and 1.11V going down. Connect EN to VIN through a pull-up resistor or a resistive voltage divider for automatic startup. You can use an external resistor divider from VIN to program a VIN threshold below which MxL76502 operation is stopped. There is an internal 1000KΩ (typical) pull-down resistor from EN to the internal AGND. |
| 5 | VIN | Supply Voltage pin. The VIN pin supplies power for the internal MOSFET and regulator. The MxL76502 device operates from a 4.5V to 18V input rail. An input capacitor is required to decouple the input rail. |
| 6 | SW | Switch Output pin. Connect this pin to the inductor and bootstrap capacitor. The SW node must be kept small on the PCB for good performance and low electro-magnetic interference (EMI). |

Block Diagram

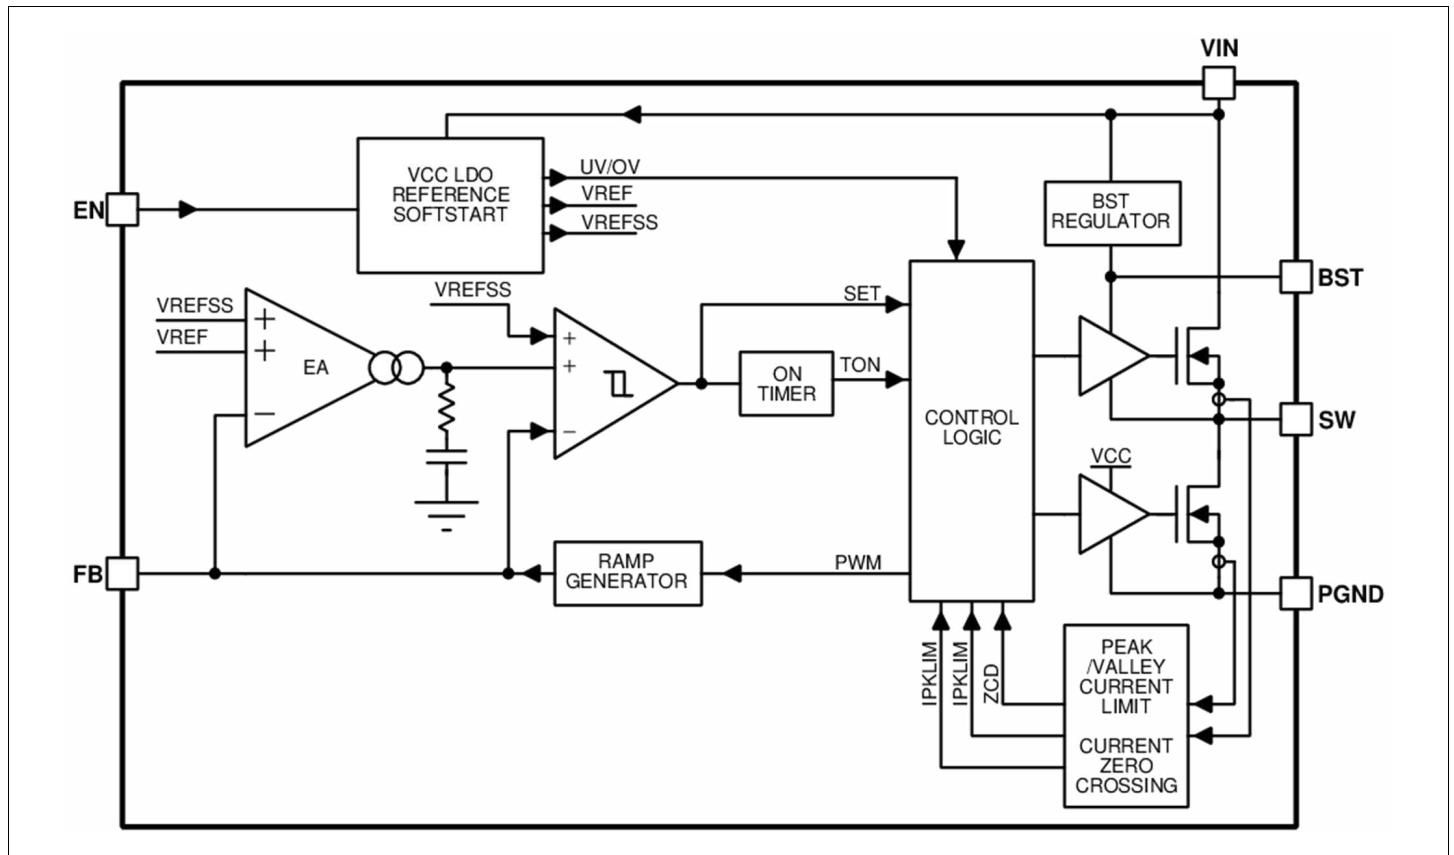


Figure 5: Functional Block Diagram

Typical Application Circuit

The following figure shows a typical application of the MxL76502.

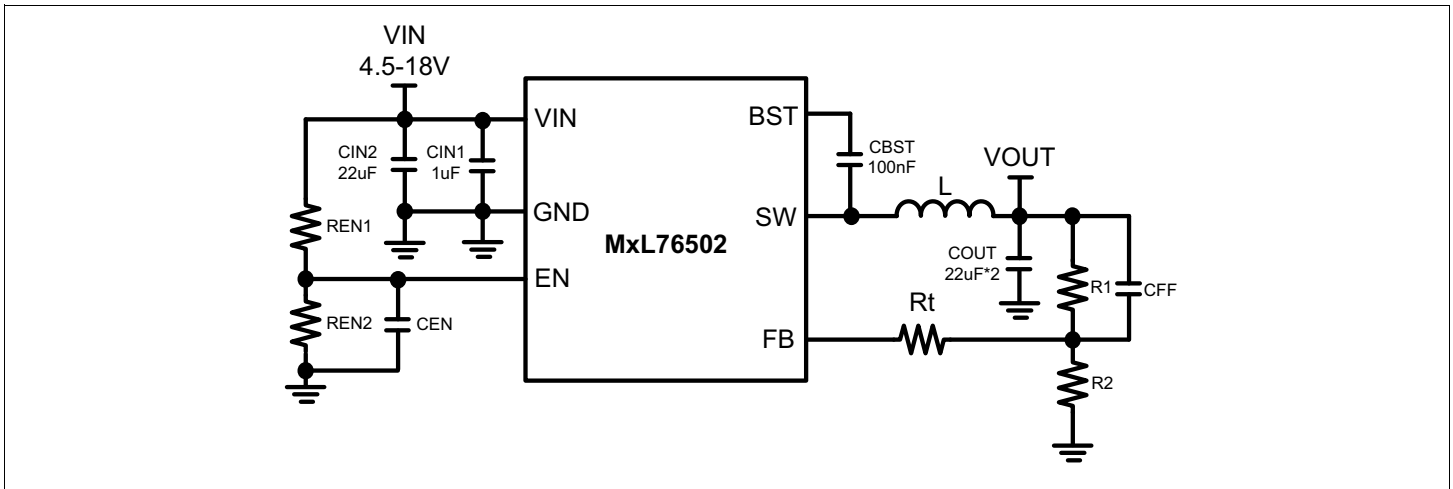


Figure 6: MxL76502 Typical Application

Typical Performance Characteristics

$V_{IN} = 12V$, $V_{OUT} = 5V/1V$, $L = 4.7\mu H/1.5\mu H$, $T_J = 25^\circ C$, unless otherwise specified.

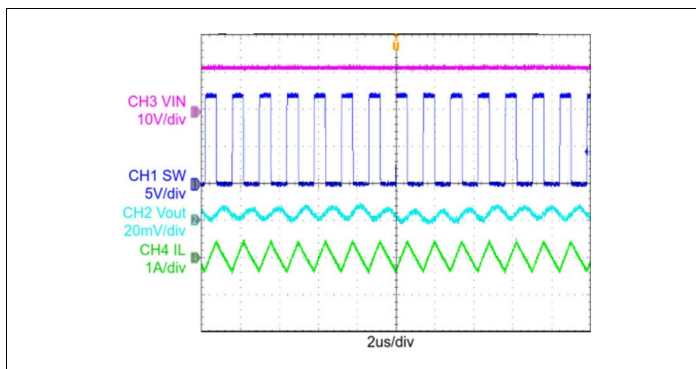


Figure 7: Steady State Test— $V_{IN} = 12V$, $V_{OUT} = 5V$, $I_{OUT} = 0A$

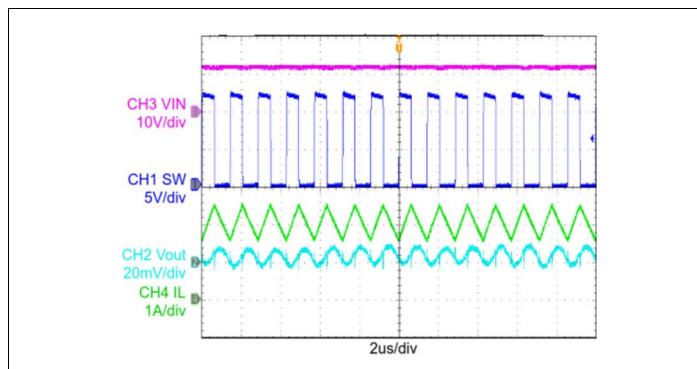


Figure 8: Steady State Test— $V_{IN} = 12V$, $V_{OUT} = 5V$, $I_{OUT} = 2A$

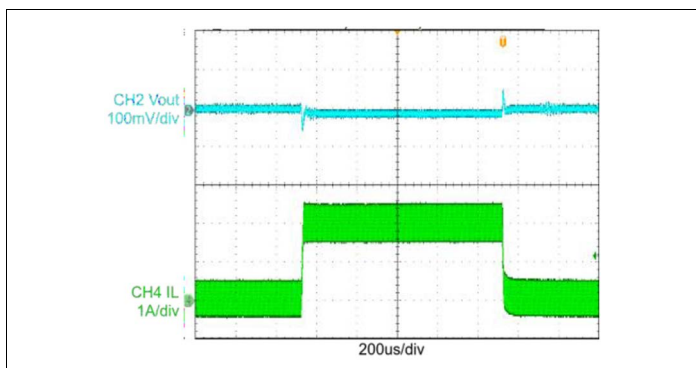


Figure 9: Load Transient Response— $V_{IN} = 12V$, $V_{OUT} = 5V$, $I_{OUT} = 0A-2A$

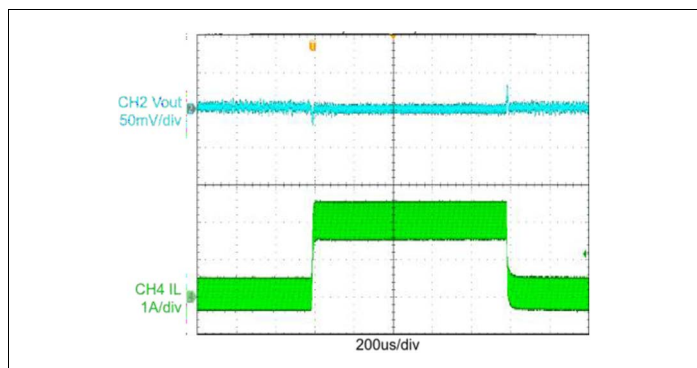


Figure 10: Load Transient Response— $V_{IN} = 12V$, $V_{OUT} = 1V$, $I_{OUT} = 0A-2A$

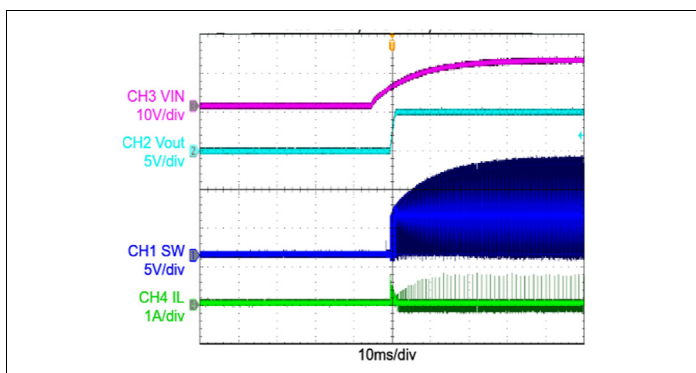


Figure 11: V_{IN} Power On— $V_{IN} = 12V$, $V_{OUT} = 5V$, $I_{OUT} = 0A$

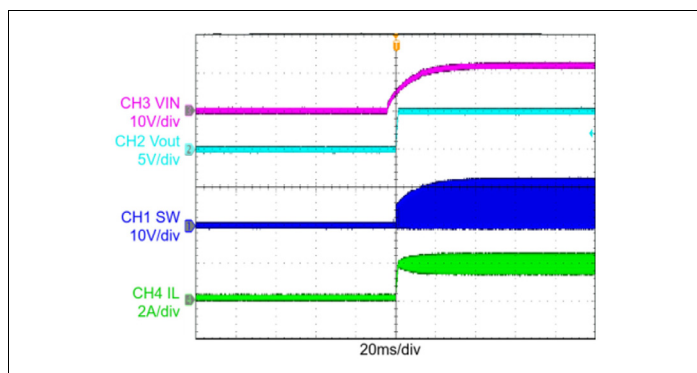


Figure 12: V_{IN} Power On— $V_{IN} = 12V$, $V_{OUT} = 5V$, $I_{OUT} = 2A$

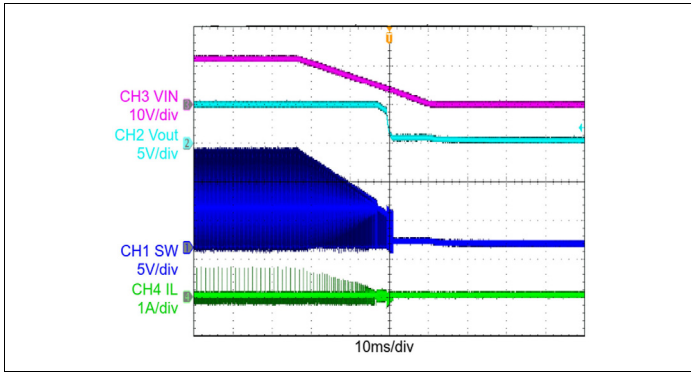


Figure 13: V_{IN} Power Off— $V_{IN} = 12V$,
 $V_{OUT} = 5V$, $I_{OUT} = 0A$

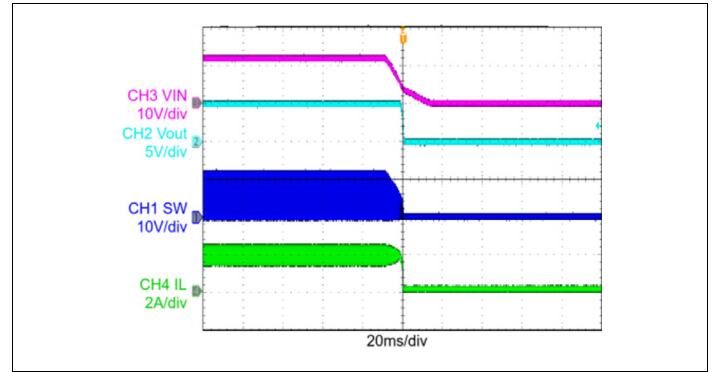


Figure 14: V_{IN} Power Off— $V_{IN} = 12V$,
 $V_{OUT} = 5V$, $I_{OUT} = 2A$

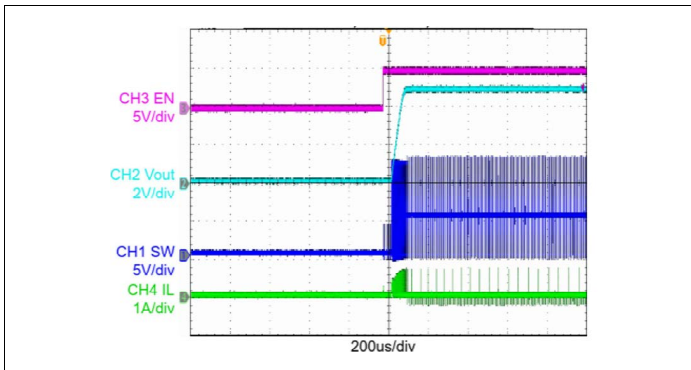


Figure 15: EN Power On— $V_{IN} = 12V$,
 $V_{OUT} = 5V$, $I_{OUT} = 0A$

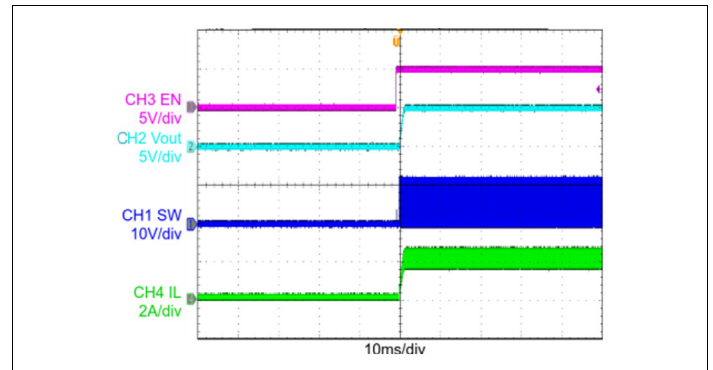


Figure 16: EN Power On— $V_{IN} = 12V$,
 $V_{OUT} = 5V$, $I_{OUT} = 2A$

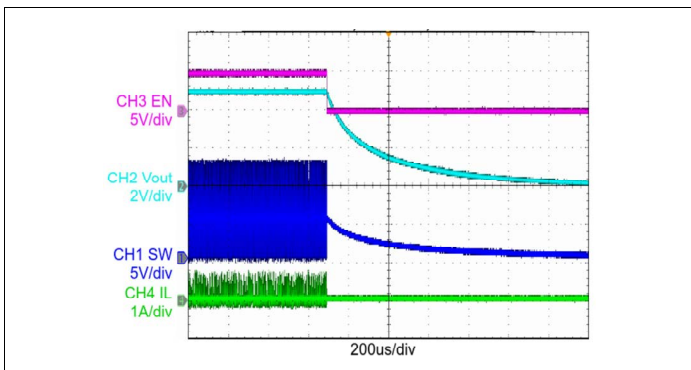


Figure 17: EN Power Off— $V_{IN} = 12V$,
 $V_{OUT} = 5V$, $I_{OUT} = 0A$

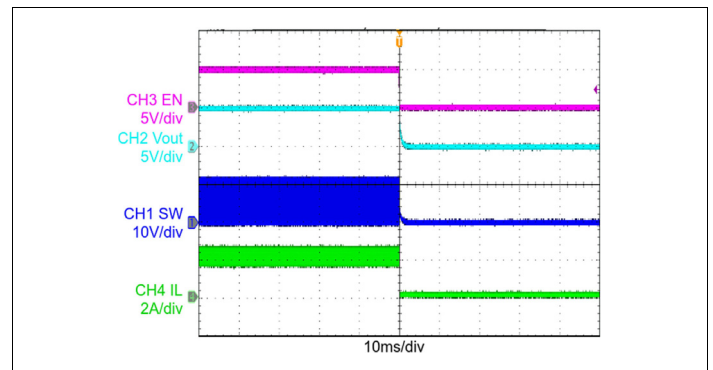


Figure 18: EN Power Off— $V_{IN} = 12V$,
 $V_{OUT} = 5V$, $I_{OUT} = 2A$

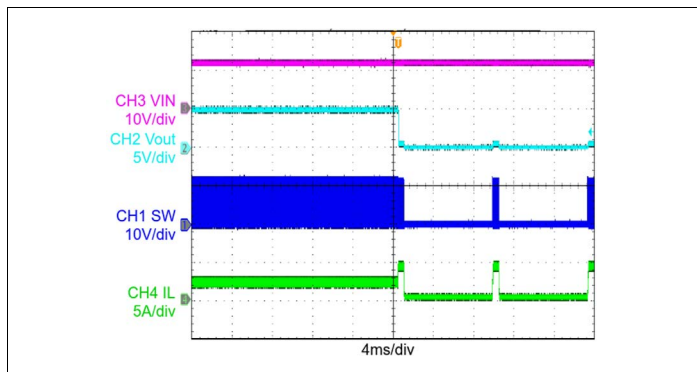


Figure 19: Short Circuit Protection—
 $V_{IN} = 12V$, $V_{OUT} = 5V$, $I_{OUT} = 2A$ —Short

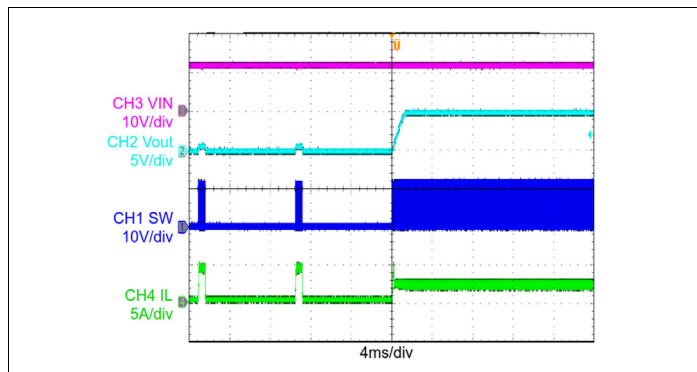


Figure 20: Short Circuit Protection Recovery—
 $V_{IN} = 12V$, $V_{OUT} = 5V$, $I_{OUT} = \text{Short}-2A$

Operation

The MxL76502 device is a fully integrated synchronous step-down converter that uses a constant on-time (COT) control scheme to achieve superior transient performance. With adjustable external ramp compensation, it can achieve stable operation with lower equivalent series resistance (ESR) ceramic output capacitors and excellent transient response.

Constant On-Time Control

The constant on-time control (COT) operates by comparing the feedback voltage V_{FB} with the reference voltage (V_{FBREG}). When FB drops below the reference, the control circuit immediately turns on the high-side (HS) switch for a predetermined period of time (on-time) to ramp up the inductor current. When this on-time times out, the low-side (LS) switch is then turned on to ramp down the inductor current. The LS switch is turned off when the inductor current reaches zero I_{ZX} (or triggers the negative current limit I_{NEG} MxL76502) or the HS switch is turned on again for the next cycle. This operation repeats if FB drops below the reference again.

The MxL76502 uses a proprietary algorithm to calculate the on-time based on the input voltage and output voltage to achieve a nearly constant switching frequency over the entire continuous conduction load current range. The on-time can be estimated as:

$$T_{ON} = \frac{V_{OUT}}{V_{IN}} \times \frac{1}{F_{SW}}$$

Due to its immediate response to the FB voltage drop and simplified loop compensation, the MxL76502 offers superior transient response compared to traditional fixed-frequency pulse-width modulation (PWM) control converters.

Light Load Operation (MxL76502N)

Under medium and heavy load conditions, the MxL76502N operates in PWM mode with a typical switching frequency of 720KHz. When the load current reduces, the MxL76502N naturally transitions from PWM mode to PFM mode where the pulse width remains the calculated on-time but the switching frequency reduces to accommodate the low output current. The lower the output current, the lower the switching frequency. Once the switching frequency drops low enough, the device enters sleep mode to cut down its quiescent current to maintain high efficiency under light load.

The critical load current at the boundary of PWM mode and PFM mode is related to the inductor ripple current, which depends on the inductor value, input voltage, and output voltage. Typically, this critical load current level is estimated as:

$$I_{CRIT} = \frac{1}{2} \times \frac{(V_{IN} - V_{OUT}) \times V_{OUT}}{L \times F_{SW} \times V_{IN}}$$

Forced PWM Mode Operation (MxL76502A)

The MxL76502A operates in forced PWM (FPWM) operation. The main difference between FPWM mode and PFM mode is the inductor current at light load: the output load lower than the inductor current operates in boundary conduction mode. When the high-side FET (HSFET) turns off, the inductor current discharges and reaches zero and the low-side FET (LSFET) remains on for the FPWM part. This makes the inductor current become negative until the LSFET turns off and the inductor discharges to the input capacitor. In FPWM mode, the switching frequency remains constant at around 720kHz. The high switching frequency decreases the light load efficiency but provides high transient response and low output voltage ripple at light load.

100% Duty Cycle Low-Dropout Operation

When the input voltage approaches the output voltage, the MxL76502 device extends the on-time toward the maximum on-time to meet the duty cycle requirement to regulate the output voltage. If the input drops further to or below the output level, the MxL76502 forces the main HS switch to remain on for more than one cycle, eventually reaching 100% duty cycle. The 100% duty cycle operation enables the converter to efficiently pass through the input voltage directly to the output with minimum voltage drops on the HS switch and the inductor. In low-dropout operation mode, the MxL76502 turns on the HS switch for multiple switching cycles until it momentarily turns off the HS switch and turns on the LS switch (typically 140ns) to refresh the BST supply voltage. The LS switch is turned off after the BST refresh pulse, and then the HS switch resumes on for multiple switching cycles, which gives the effective 100% duty cycle. The BST refresh pulse is necessary to charge the BST capacitor and ensure correct operation of the HS switch driver circuits.

Enable

The MxL76502 offers an accurate EN pin enable threshold. The MxL76502 is enabled by pulling up the EN pin above 1.21V and it is disabled by pulling down the EN pin below 1.11V.

When using the EN pin threshold voltage to program the input startup voltage level, the following equation should be used:

$$V_{IN_START} = 1.21V \times \frac{R_{UP} + R_{DOWN} // 1M\Omega}{R_{DOWN} // 1M\Omega}$$

Where 1MΩ is the internal pull-down resistor on the EN pin.

When EN is pulled high, the MxL76502 starts up if V_{IN} is higher than the under-voltage lockout (UVLO) threshold. When EN is pulled low, the MxL76502 shuts down. Connect the EN pin to V_{IN} if the shutdown feature is not used.

Soft-Start

The MxL76502 features a built-in internal soft-start of 1.2msec. During the soft-start period, the output voltage is ramped up linearly to the regulation level, independent of the load current and output capacitor value.

Current Limit and Hiccup Mode

The MxL76502 features a built-in cycle-by-cycle current-limit protection to prevent the inductor current from operating at an abnormally high or even saturated current in any fault condition. The MxL76502 continuously monitors the inductor valley current during its operation. Once the valley current exceeds the limit level, the MxL76502 turns on the LS switch and waits for the inductor current to drop down to a predetermined level before the HS switch can be turned on again. If this current-limit condition is repeated for a long, extended period of time, the MxL76502 enters hiccup mode, where it stops switching for a predetermined period of time before automatically trying to start up again. It always starts up with a soft-start to limit the inrush current and avoid output overshoot.

When the MxL76502 enters valley current-limit mode, the peak current is also limited due to the fixed HS switch on-time, and this peak current can be estimated as:

$$I_{PEAK} = I_{VALLEY} + T_{ON} \times \frac{V_{IN} - V_{OUT}}{L}$$

Application Information

Output Voltage Setting

The external feedback resistor divider sets the output voltage (see [Figure 1](#) on page i). MaxLinear recommends resistors of 1% to maintain output voltage accuracy. The feedback resistor R1 has an impact on the loop stability with the internal compensation capacitor. Choose a value for R1 and R2. The corresponding equation is as follows:

$$R1 = R2 \times \left(\frac{V_{OUT}}{V_{FB}} - 1 \right)$$

Note: MaxLinear recommends that R1 be 100kΩ.

Inductor

The inductor is necessary to supply a constant current to the output load while being driven by the switched input voltage. A higher-value inductor results in a lower ripple current, which results in a lower output ripple voltage. However, a higher-value inductor has a larger physical footprint, higher series resistance, and/or lower saturation current. To determine the inductance value, MaxLinear recommends designing the peak-to-peak ripple current in the inductor so that it ranges from 30% to 40% of the maximum output current, and the peak inductor current is below the maximum switching current limit. The inductance value can be calculated by:

$$L = \frac{V_{OUT}}{F_{SW} \times \Delta I_L} \times \left(1 - \frac{V_{OUT}}{V_{IN}} \right)$$

Where ΔI_L is the peak-to-peak inductor ripple current.

To avoid overheating and poor efficiency, you must choose an inductor with an RMS current rating greater than the maximum expected output load of the application. Additionally, the saturation current (typically referred to as I_{sat}) rating of the inductor must be higher than the maximum load current plus half of the inductor's ripple current.

The peak inductor current can be calculated by:

$$I_{L-PEAK} = I_{OUT} + \frac{V_{OUT}}{2F_{SW} \times L} \times \left(1 - \frac{V_{OUT}}{V_{IN}} \right)$$

Input Capacitor

The input current to the step-down converter is discontinuous and therefore requires a capacitor to supply the AC current to the step-down converter while maintaining the DC input voltage. MaxLinear recommends using ceramic capacitors for best performance and placing them as close to the VIN pin as possible. MaxLinear recommends capacitors with X5R and X7R ceramic dielectrics because they are fairly stable with temperature fluctuations. The capacitors must also have a ripple current rating greater than the maximum input ripple current of the converter. The input ripple current can be estimated as follows:

$$I_{CIN} = I_{OUT} \times \sqrt{\frac{V_{OUT}}{V_{IN}} \times \left(1 - \frac{V_{OUT}}{V_{IN}}\right)}$$

The worst-case condition occurs at $V_{IN} = 2 \times V_{OUT}$, where:

$$I_{CIN} = \frac{I_{OUT}}{2}$$

To simplify, choose the input capacitor with an RMS current rating greater than half of the maximum load current. The input capacitance value determines the input voltage ripple of the converter. If the system must meet an input voltage ripple, choose the input capacitor that meets the specification. The input voltage ripple can be estimated as follows:

$$\Delta V_{IN} = \frac{I_{OUT}}{F_{SW} \times C_{IN}} \times \frac{V_{OUT}}{V_{IN}} \times \left(1 - \frac{V_{OUT}}{V_{IN}}\right)$$

Under worst-case conditions where $V_{IN} = 2 \times V_{OUT}$:

$$\Delta V_{IN} = \frac{1}{4} \times \frac{I_{OUT}}{F_{SW} \times C_{IN}}$$

Output Capacitor

The output capacitor has two essential functions:

- Together with the inductor, it filters the square wave generated by the MxL76502 to produce the DC output. In this role, it determines the output ripple, thus a low impedance at the switching frequency is important.
- It stores energy to satisfy transient loads and stabilize the MxL76502's control loop. X5R or X7R-type ceramic capacitors have very low ESR and provide low output ripple and good transient response. Transient performance can be improved with a higher value output capacitor and the addition of a feed-forward capacitor placed between V_{OUT} and FB.

Increasing the output capacitance also decreases the output voltage ripple. You can use a lower value output capacitor to save space and cost, but transient performance suffers and can cause loop instability. When choosing a capacitor, particular attention should be paid to this data sheet to calculate the effective capacitance under the relevant operating conditions of voltage bias and temperature. A physically larger capacitor or one with a higher voltage rating may be required.

Mechanical Dimensions

SOT23-6L

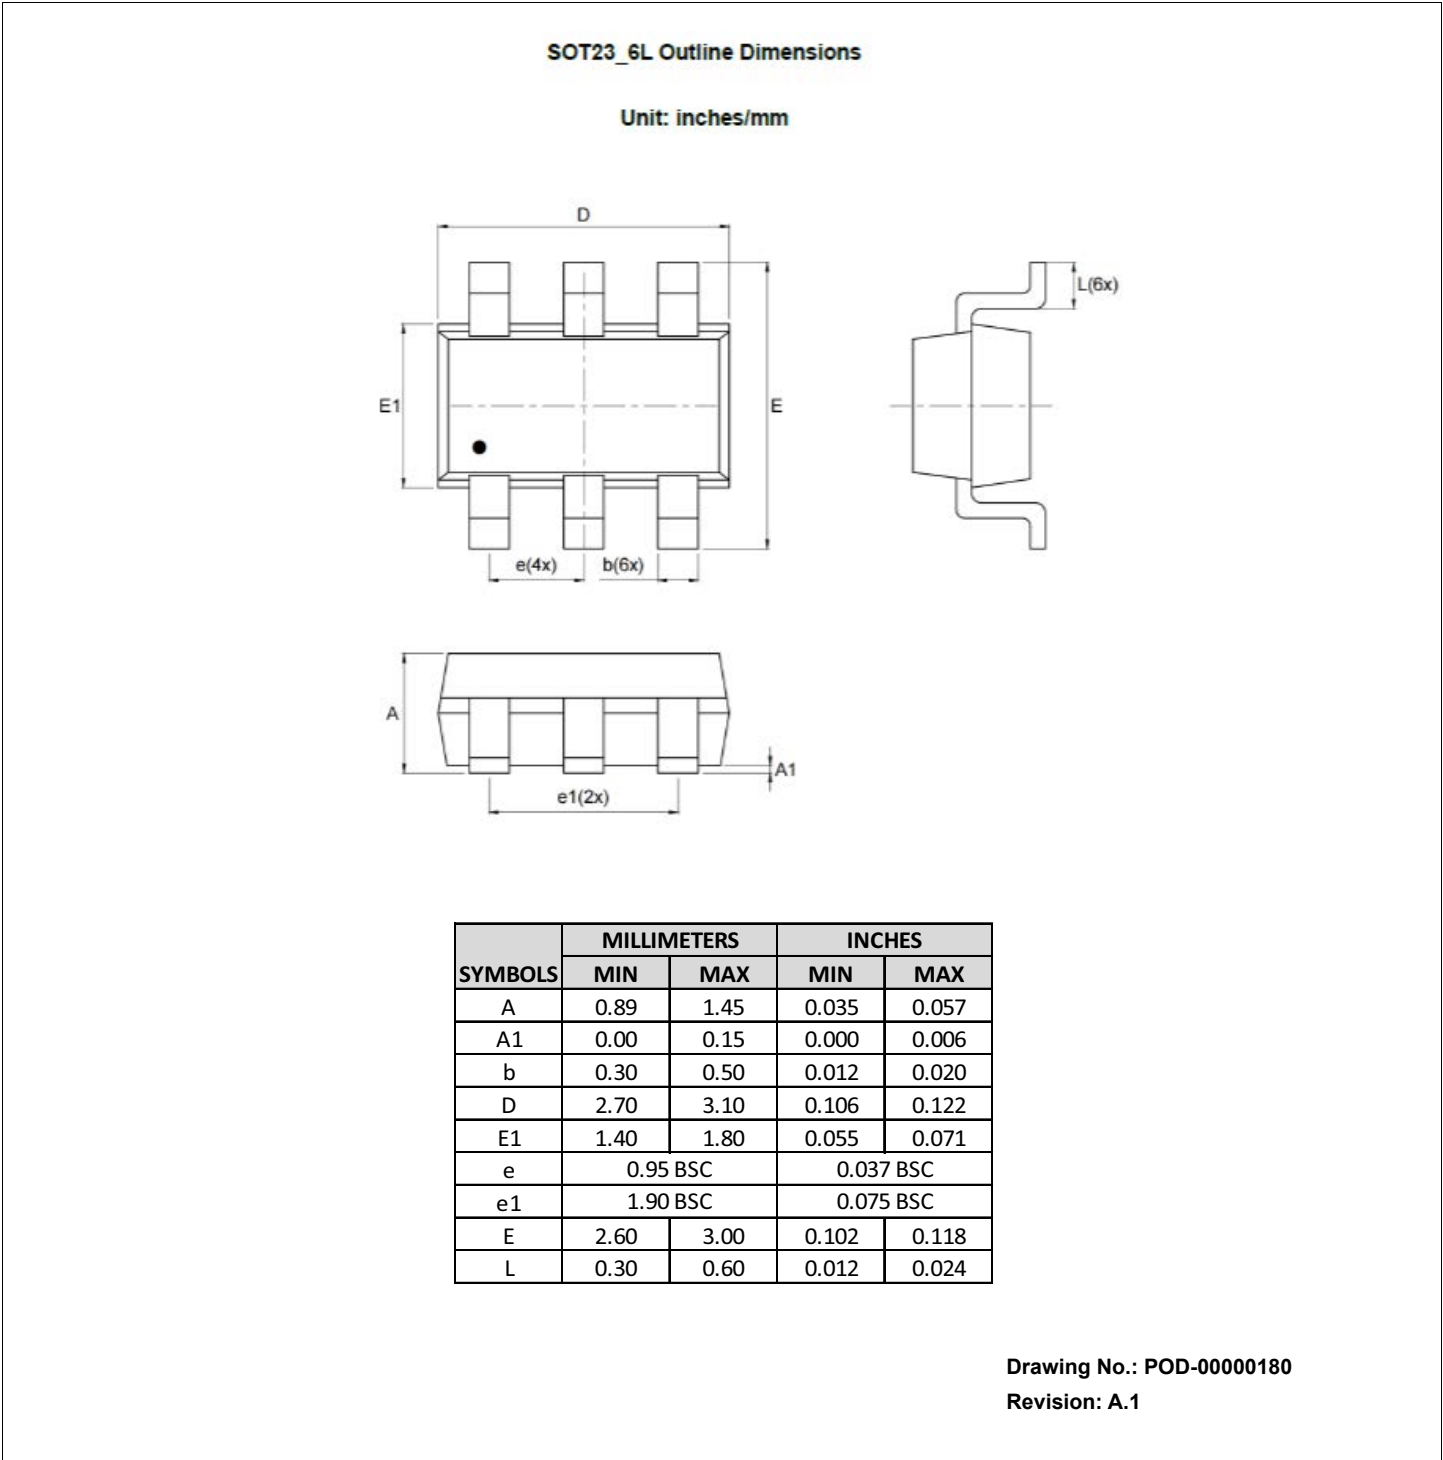


Figure 21: Mechanical Dimensions—SOT23-6L

Recommended Land Pattern and Stencil

SOT23-6L

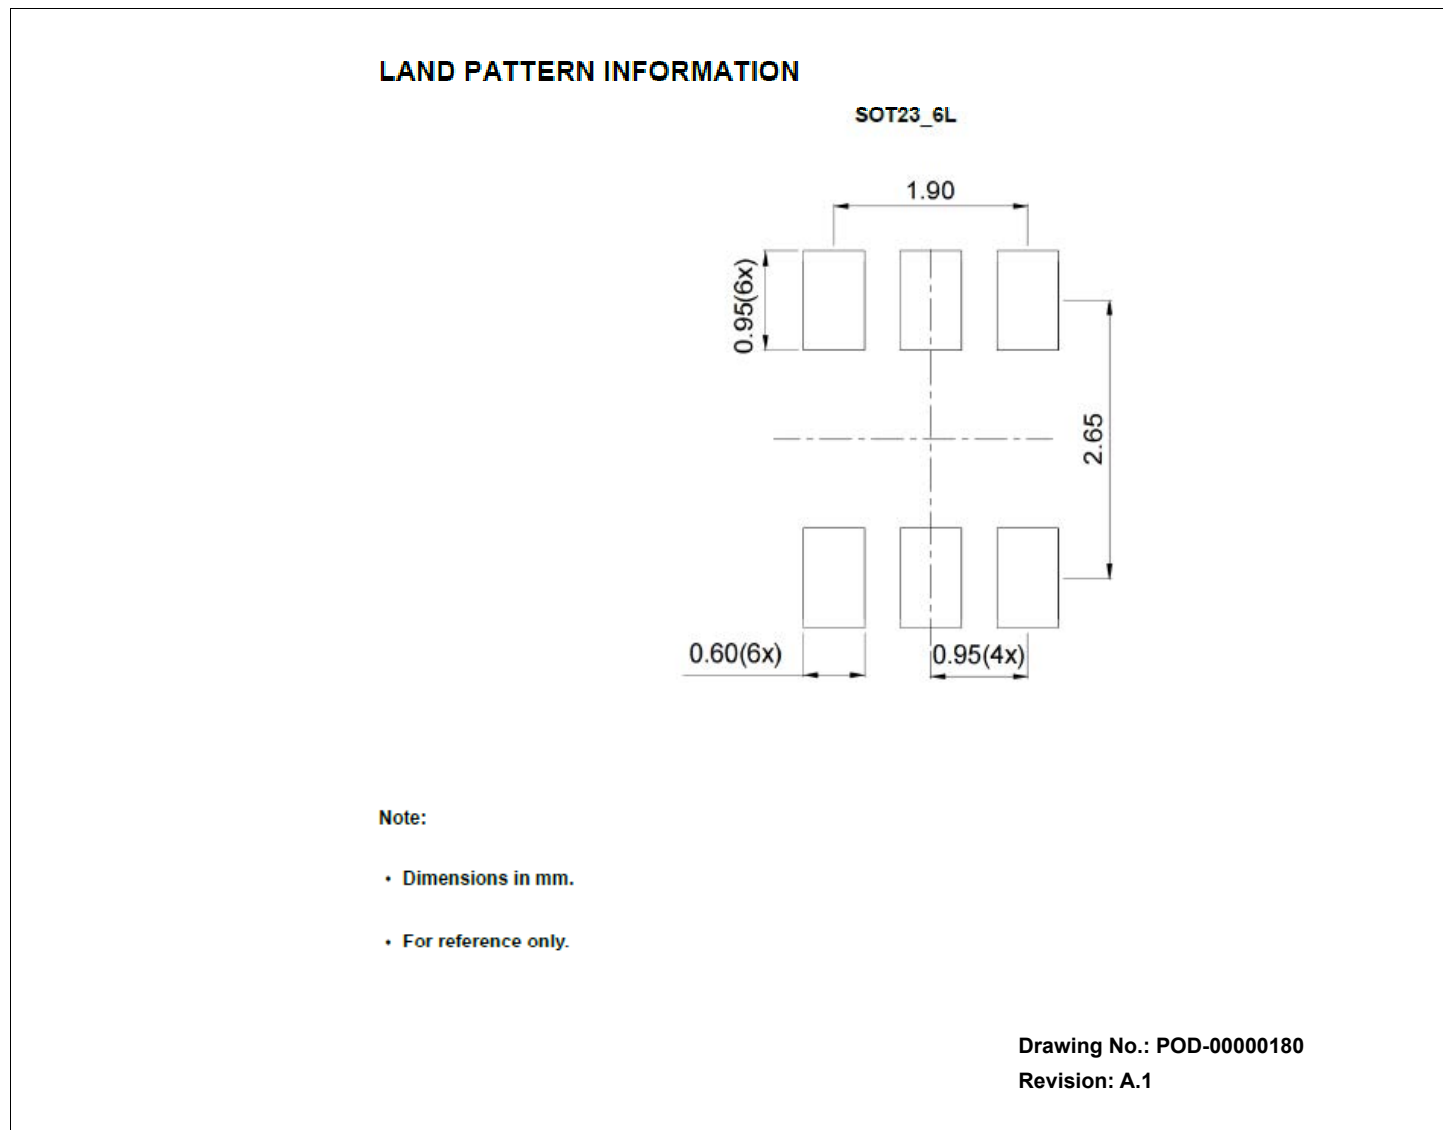


Figure 22: Recommended Land Pattern and Stencil—SOT23-6L

Ordering Information

Table 6: Ordering Information

| Ordering Part Number | Operating Temperature Range | Remark | Package | Packaging |
|----------------------|-----------------------------|---|----------|--------------------|
| MXL76502N-ASA-R | –40°C to 85°C | MxL76502N: PFM mode (ASA)— Non-China OSAT | SOT23-6L | 3000/Tape and Reel |
| MXL76502N-BSA-R | –40°C to 85°C | MxL76502N: PFM mode (BSA)— China OSAT | SOT23-6L | 3000/Tape and Reel |
| MXL76502A-ASA-R | –40°C to 85°C | MxL76502A: FPWM mode (ASA)— Non-China OSAT | SOT23-6L | 3000/Tape and Reel |
| MXL76502A-BSA-R | –40°C to 85°C | MxL76502A: FPWM mode (BSA)— China OSAT | SOT23-6L | 3000/Tape and Reel |

Note: For more information about part numbers, as well as the most up-to-date ordering information and additional information on environmental rating, go to www.maxlinear.com/MxL76502.



MaxLinear, Inc.
5966 La Place Court, Suite 100
Carlsbad, CA 92008
Tel.: +1 (760) 692-0711
Fax: +1 (760) 444-8598

www.maxlinear.com

The content of this document is furnished for informational use only, is subject to change without notice, and should not be construed as a commitment by MaxLinear, Inc. MaxLinear, Inc. assumes no responsibility or liability for any errors or inaccuracies that may appear in the informational content contained in this document. Complying with all applicable copyright laws is the responsibility of the user. Without limiting the rights under copyright, no part of this document may be reproduced into, stored in, or introduced into a retrieval system, or transmitted in any form or by any means (electronic, mechanical, photocopying, recording, or otherwise), or for any purpose, without the express written permission of MaxLinear, Inc.

EXCEPT AS OTHERWISE PROVIDED EXPRESSLY IN WRITING BY MAXLINEAR, AND TO THE MAXIMUM EXTENT PERMITTED BY LAW: (A) THE MAXLINEAR PRODUCTS ARE PROVIDED ON AN "AS IS" BASIS WITHOUT REPRESENTATIONS OR WARRANTIES OF ANY KIND, INCLUDING WITHOUT LIMITATION ANY IMPLIED OR STATUTORY WARRANTIES AND ANY WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, NON-INFRINGEMENT, OR TITLE; AND (B) MAXLINEAR DOES NOT GUARANTEE THAT THE PRODUCTS WILL BE FREE OF ERRORS OR DEFECTS. MAXLINEAR PRODUCTS SHOULD NOT BE USED IN ANY EMERGENCY, SECURITY, MILITARY, LIFE-SAVING, OR OTHER CRITICAL USE CASE WHERE A FAILURE OR MALFUNCTION COULD CAUSE PERSONAL INJURY OR DEATH, OR DAMAGE TO OR LOSS OF PROPERTY. USERS ASSUME ALL RISK FOR USING THE MAXLINEAR PRODUCTS IN SUCH USE CASE. CUSTOMERS AND USERS ARE SOLELY RESPONSIBLE FOR USING THEIR OWN SKILL AND JUDGMENT TO DETERMINE WHETHER MAXLINEAR PRODUCTS ARE SUITABLE FOR THE INTENDED USE CASE.

MaxLinear, Inc. may have patents, patent applications, trademarks, copyrights, or other intellectual property rights covering subject matter in this document. Except as expressly provided in any written license agreement from MaxLinear, Inc., the furnishing of this document does not give you any license to these patents, trademarks, copyrights, or other intellectual property.

MaxLinear, the MaxLinear logo, and any other MaxLinear trademarks (including but not limited to MxL, Full-Spectrum Capture, FSC, AirPHY, Puma, AnyWAN, VectorBoost, MXL WARE, and Panther) are all property of MaxLinear, Inc. or one of MaxLinear's subsidiaries in the U.S.A. and other countries. All rights reserved.

All third-party marks and logos are trademarks™ or registered® trademarks of their respective holders/owners. Use of such marks does not imply any affiliation with, sponsorship or endorsement by the owners/holders of such trademarks. All references by MaxLinear to third party trademarks are intended to constitute nominative fair use under applicable trademark laws.

The URLs provided are for informational purposes only; they do not constitute an endorsement or an approval by MaxLinear of any of the products or services of the corporation or organization or individual. MaxLinear bears no responsibility for the accuracy, legality or content of the external site or for that of subsequent links. Contact the external site for answers to questions regarding its content.

© 2025 MaxLinear, Inc. All rights reserved.